


A-type ENGINE TUNING PARTS



A-type reinforced rocker shaft

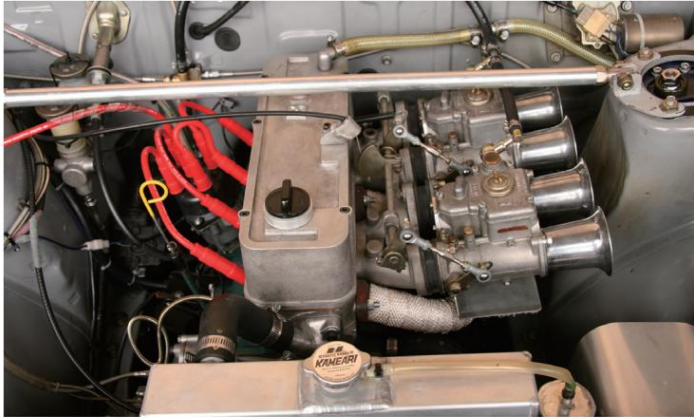

This is a reinforced rocker shaft with improved fatigue strength and sliding properties. Heat treatment has been used to increase the surface hardness, which has a significant effect on wear resistance and increased durability.

SET unit ¥14,000

A-type valve cotter



SET unit ¥3,000

*For 8mm stem

It prevents variations in spring set length caused by over-revving or surging, and engine trouble, and maintains the best condition for a long period of time.

A-type reinforced engine mount



This is a reinforced product with increased rubber hardness to absorb engine vibrations appropriately and transmit engine power to the drive system efficiently.

Unit price: ¥15,000

Compatible models

- B310, B110 Sunny
- B120, GB122 Sunny Truck

A-type reinforced mission mount



By using reinforced rubber that is 1.5 times stronger than the original, the reinforced rubber absorbs vibrations transmitted from the transmission to the shift lever, improving the operability of shifting.

Unit price: ¥6,000

Compatible models

- B110, B210, B310 Sunny

A-type chrome flywheel



•STD type

Weight: 3.5kg
Price: ¥50,000

•R type

Weight: 2.7kg
Price: ¥54,000

*When installing a chromium flywheel on the A14 or A15, please use the A12 standard 27mm sleeve. *A12 standard 27mm sleeve sold separately ¥1,900

A-type reinforced valve spring



Unit price: ¥16,000

Valve lift 13mm compatible
Set load 43k Full
load 108k (at 12mm)

A type racing valve spring with load calculated based on 10,000 rpm. With the advantage of a maximum valve lift of 13mm and a maximum load of 115kg, it can be used with any specifications and fully utilizes the performance of the cam.

A-type ARP head stud bolt



For A12

Unit price: ¥28,000

*Display position: front type

For A12/A14 / A15

Unit price: ¥28,000

*Display position central type

This is a stud type head bolt designed by ARP, an American company. It has a strength standard of 200,000 PSI, and ensures sufficient tensile strength. In addition, the use of stud bolts reduces the deformation of the cylinder bore caused by tightening the head bolts by half, stabilizing the piston clearance.

A-type 40/33 race seat ring



Made of sintered alloy with excellent heat and wear resistance. Designed to be the best size for 40/33 valves, it can withstand the harsh conditions of racing engines.

Unit price: ¥16,000

A-type reinforced flywheel bolt




ARP (USA) Strength standard: 200,000psi
Tightening torque: 13.5kg/m

Unit price: ¥11,500

Type A Water Temperature Sensor Adapter



This is a sensor adapter that can convert the A-type specific inch thread to M16 x P1.5. This allows you to install an aftermarket mechanical water temperature sensor in its original position without having to insert it into the radiator hose.



(Product number: WT-001AW)

*Copper washer included

Unit price: ¥1,200

A-type reinforced clutch



•Reinforced clutch cover

Pressure: 450kg
Price: ¥25,000

•Metal clutch disc Price: ¥24,500



A-type clutch sleeve and bearing set

The contact position of the bearing with the clutch cover has been changed to the center, which reduces the pedal load and greatly improves half-clutch operability.

Price: ¥5,150

*27mm sleeve included.

*The contact area between the bearing and clutch cover has a diameter of 50j. Suitable for the above clutches.